





Tehničke karakteristike artikla: HSEMRJ6GWT

TOOLLESS LINE-RJ45 Modul, Cat.6a 10Gbit, STP (SFA)

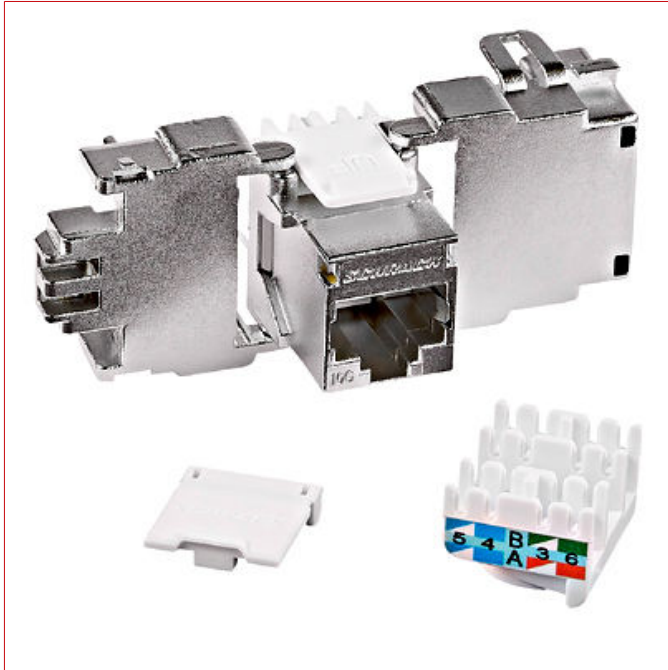

SCHRACK info

Shielded TOOLLESS LINE RJ45 keystone module for transmission of analog and digital voice, image and data signals. Performance specifications, together with Schrack category 7 cables and Schrack Class EA patchcords, correspond to Class EA up to 500 MHz. This is attested by a 4-conductor channel certificate from the GHMT test laboratory. The module is made from 2 parts only and can be installed without the need of any special tool (TOOLLESS). This results in a very convenient and also very quick installation. The module is now contacted to the shield of the cable by a spring-type contact, which is integrated into the EMC-compliant body and cannot be lost. Enhanced electro magnetic compliance (EMC) performance is achieved by the 360° shielding and optimized overlapping of the bodyparts. The module can be re-opened and re-installed. Included in the package is a dust-cover, that can be clipped on, if necessary. It protects the contact-pins against dust and contamination. Please take care that our TOOLLESS LINE data-outlets are already equipped with dust-covers. Thus we recommend the use of these dust-covers only for modules that are used in TOOLLESS LINE patchpanels.

TEHNIČKI PODACI

- Electrical characteristics: Class EA 500 MHz 10 Gb/s
- De-embedded certified according to IEC 60603-7-5
- Standards: ISO/IEC 11801 Amendment 1 JTC 1/SC N1173, 2006-04
TIA/EIA-568-B.2-10 (Draft 5.0, 2006-07)
IEEE 802.3an TM-2006
IEC 60603-7-5 Ed. 1.0 (ACDV 09.2003)
- Meets EN 55022 EMC standard
- DC voltage proof to IEC 60512-4-1
- Contact cycles (Jack/Patchcord): >750
- Re-Connecting (Jack / Installation cable with same wire gauge): >20
- Configuration: 1-2, 3-6, 4-5, 7-8
- Gold-plating of contacts: 50 µ-inch
- GHMT certified
- Module made from 2 parts only
- Housing: Zinc-alloy, 100% shielded
- 360° Shielding, spring-type
- Wire contacting via IDC self-stripping terminals with color-coded (EIA/TIA 568A and B) wire recess
- Toolless installation (no special LSA tool required)
- Earthing contact (Fast-On) at back of housing
- Module can be re-opened and re-installed
- Installation cables to be used: wire-diameter from AWG24 – AWG22
- Dust-cover (white) included in package. Other colors (Red, Blue, Yellow, Black) optionally available: HSEMRJZSKx.
- Module to be used in TOOLLESS LINE patchpanels and outlets
- 4PPoE fähig



Tehnički podaci

Neto dužina (mm) | 41,00

Tehnički podaci - nastavak

Neto širina (mm)	17,00
Neto visina (mm)	26,00
Neto težina (kg)	0,03
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	60
Serijski broj	TOOLLESS LINE
Kategorija	Class E _A / 10GB
Oklop	oklopljen
SCHRACK Format	SFA
Portovi	1

Tabela artikla

OPIS	NVP (%)	MASA BAKRA (kg/km)	Kat. broj
TOOLLESS LINE-RJ45 Modul, Cat.6a 10Gbit, STP (SFA)			HSEMRJ6GWT
Dodatni pribor			
Kabl inst.Cat.7 S/FTP - 1000 Mhz, 4x2xAWG-23, LS0H, plavi za rezanje	78	28	HSEKP423HB
Kabl inst.Cat.6a F/FTP-500MHz, 4x2xAWG23/1,LS0H-3,Dca, plavi za rezanje	80	20	HSEKP423GA
TOOLLESS LINE-Utičnica za 1 modul, kosa, 80x80mm čisto bijela			HSED01UW2S
TOOLLESS LINE-Utičnica za 2 modula, kosa, 80x80mm čisto bela			HSED02UW2S
TOOLLESS LINE-Utičnica za 3 modula, kosa, 80x80mm čisto bijela			HSED03UW2S
TOOLLESS LINE-19" Patch panel za 24 m.,prazan,ozn. Polja Svetlosive boje RAL7035,visine 1HU			HSER0240GZ
TOOLLESS LINE-19" Patch panel za 24 modula,prazan,visine 1HU svetlo sivi, jezičak prespojnog kabla okrenut prema dole			HSER0240GS
TOOLLESS LINE - Nosač RJ45 modula (SFA, SFB) za DIN šinu Lightgrey			HSERH010GS
TOOLLESS LINE-45x45, nosač modula, 45x22,5mm Pure white			HSEMD01W1F
TOOLLESS LINE-45x45, nosač modula dupli kosi, 45x45mm NAPOMENA: za integraciju ovog nosača u modularni sustav (VISIO 45) potreban adapter ET105083--			HSEMD02W2F
Stranične sečice za bakarne kablove - max. 1.3mm			HTOOL00002
Stranične sečice za bakarne kablove - max. 1.0mm			HTOOL00003
			H6GTG01K0K
			H6GTG02K0K
			H6GTG03K0K
			H6GTG05K0K
			H6GTG10K0K
			H6GTG20K0K
Bakarna traka za fiksiranje širma, 35x9mm, 20 kom			HSEKB0020
Bakarna traka za fiksiranje širma, 35x9mm, 1.500 kom CZCUBR15			HSEKB1800
Poklopac za zašt. od prašine, za RJ45 module, plavi, 25 kom 25 pieces			HSEMRJZSKB

Tabela artikla

OPIS	NVP (%)	MASA BAKRA (kg/km)	Kat. broj
Dodatni pribor			
Poklopac za zašt. od prašine, za RJ45 module, crveni, 25 kom 25 pieces			HSEMRJZSKR
Poklopac za zašt. od prašine, za RJ45 module, žuti, 25 kom 25 pieces			HSEMRJZSKY
Poklopac za zašt. od prašine, za RJ45 module, zeleni, 25 kom 25 pieces			HSEMRJZSKU
Poklopac za zašt. od prašine, za RJ45 module, crni, 25 kom 25 pieces			HSEMRJZSKS
Poklopac za zašt. od prašine, za RJ45 module, beli, 25 kom 25 pieces			HSEMRJZSKW
Umetak/nosač za 2xRJ45 Toolless line modula			EV104005
Pokrov za 1 *RJ45 Toolless Line jack, bela VISIO S 55 (55x55)			EV104303
Pokrov za 2 *RJ45 Toolless Line jack, bela VISIO S 55 (55x55)			EV104304
Jednostruka okvir, dizajn CUBIC, bela VISIO S 55 (55x55)			EV105301